


becker

MINING AUSTRALIA

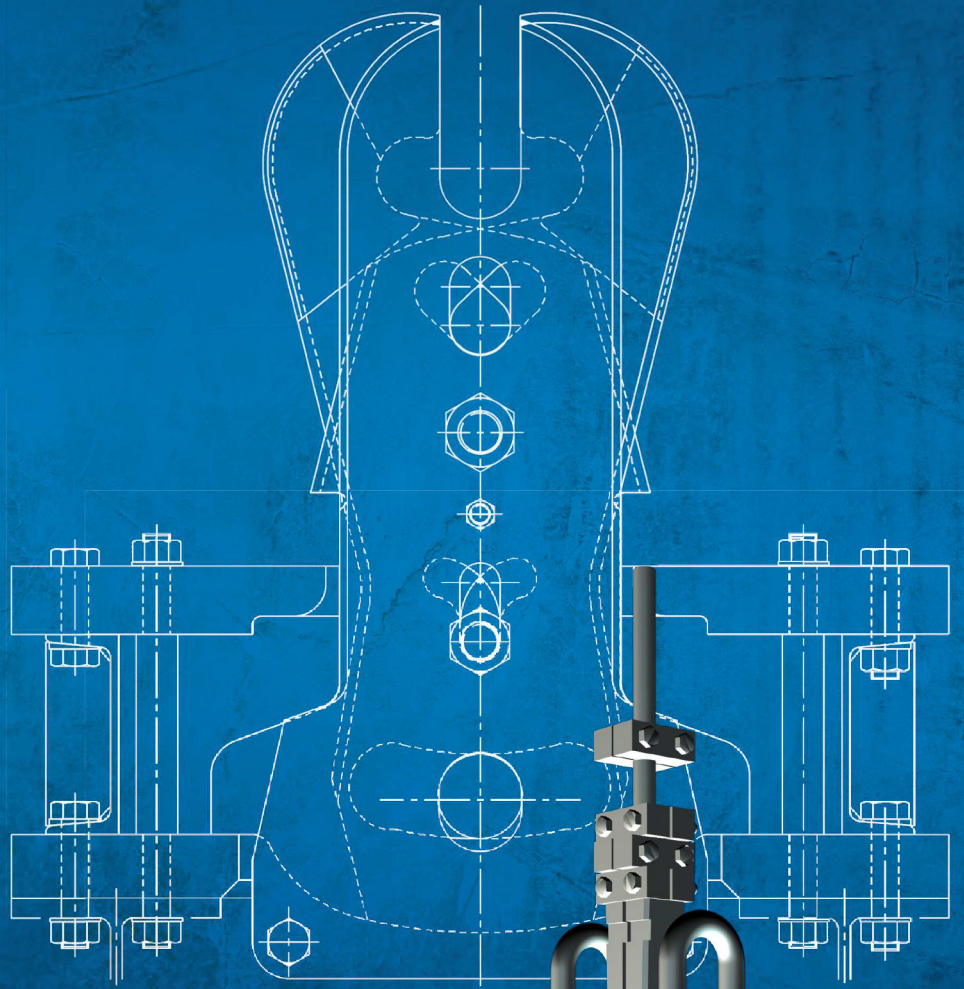

Rope Attachments

Rope Attachments

Becker Mining is the leading supplier of mine winding and guide rope attachments to the global mining industry with over 80 years' experience and a 100% safety track record in the field. All rope attachments comply with Australian government mining regulations and meet or exceed international mining house specifications.

- Safety detaching hooksets for drum winders
- Friction winder rope attachment sets
- Rope handling and maintenance equipment
- Guide rope attachments
- Maintenance and refurbishment of existing rope attachment sets
- Compensating sheave wheels



Our range

Designed and tailored to your mine site requirements



Wire Rope Socket

Rope sockets are used for the capping of winding ropes or balance ropes. The socket comprises of a cone shaped body, suitably machined to accommodate the rope end to be resin or white metal capped. The preferred method is using approved resin kits. The socket is supplied with a threaded pin with nut and split pin.



Rocket Safety Detaching Hook

The Rocket Safety Detaching Hook fulfils a vital function in drum winding installations. Their purpose is to detach the winding rope from the conveyance in the event of an overwind, and to arrest and suspend the conveyance in the headframe. The device prevents injury to personnel and extensive damage to equipment should an overwind occur. The hook can be reset to the normal closed position and released from the catch plate by a lowering shackle or links.



Winding Rope Cappel (Thimble Type)

Thimble type cappelles are used in multi-rope friction winder systems. They provide a reliable and safe method of terminating the rope and also allow for adjustment of rope lengths, the rope can be pulled in through the cappel. When used in conjunction with hydraulic compensators the thimble cappel allows for coarse adjustment of rope lengths.

Range continued:



Hydraulic Adjusting Linkages

Headropes fitted to a multirope friction winder require a means of adjusting their lengths to maintain equality between the loads applied to each rope attached to the conveyances. The HAL type hydraulic linkages are lengthtension compensating devices widely used and preferred for final and service equalisation settings in a multi-rope system.

Compensating Sheave Wheels

These devices can be fitted to a Blair multi rope winder and can rotate freely to equalise the tensions between the two ropes thus sharing the rope load equally between the two ropes.



WRC Rope Clamps

WRC interlocking wedge type rope clamps provide a convenient, positive and fail safe method of anchoring, suspending or manoeuvring wire ropes. The clamps can be used for permanent anchoring, tensioning or suspending guide ropes in a mine shaft or for manoeuvring or pre-tensioning ropes during installation and maintenance. The clamp can be supplied with a hydraulic wedge extractor which is used to smoothly extract the wedges from the casing by means of a hydraulic jacking system.

Ensuring safety, strength and reliability

Design Criteria

All rope attachments are designed in accordance with the British National Coal Board Specification and will meet all statutory requirements.

All safety critical load bearing components are designed for static and fatigue conditions and incorporate a minimum static safety factor in excess of 10:1.

Size Range

Single string rope attachments are designed in a range to suit various safe working loads from 5 ton to 45 Ton safe working loads.

Non-Destructive Testing

All rope attachments are subjected to full magnetic particle and ultrasonic non destructive testing after proof load testing.

Material Specifications

All safety critical load bearing components are manufactured from limited work hardening 1.5% manganese steel to BS2772 Part 2 (1989) Group 2 150M19 in the hardened and tempered condition.

Material test piece sets in accordance with the BS2772 specification consisting of one tensile and three Charpy V Notch impact tests per cast per furnace load are provided.

Proof Load Testing

All safety critical load bearing rope attachments are proof load tested to 250% of the components rated safe working load.

Rope attachment overhauls

At Becker Mining Australia, our team specialises in comprehensive rope attachment overhauls and delivers quality spare parts, ensuring the optimal performance and longevity of your mining operations.



Rope attachment undergoing load testing during overhaul.

For your next rope attachment overhaul, contact us at 1300BECKER



Call 1300BECKER

The future of Australian mining, today.

sales@au.becker-mining.com.au

www.beckermining.com.au

Newcastle (Head Office) | Sydney | Brisbane | Perth